



hr120MCL

HR Camera Link



Camera Link offers high data rates, deterministic timing and very direct access to the image sensor. Our high resolution industrial cameras with Camera Link provide a wide range of core features:

- > User defined defect pixel correction
- > ROI, LUT, binning, gamma, offset
- > Integrated multi channel LED strobe controller
- > Industrial TTL-24V I/O interface with SafeTrigger, programmable logic functions, sequencers and timers, RS232
- > Power over Camera Link (PoCL)

Technical Highlights

Camera Link has its advantages regarding data transfer speed, a deterministic timing and a very direct access to the imaging sensor itself. Thus it permits settings and operating modes that are not available with other interfaces.

HR Series

hr120MCL

Resolution	13272 x 9176 px
Frame rate (max.)	6.7 fps
Chroma	mono
Interface	Camera Link 80-Bit

Sensor

Sensor	120MXSM
Manufacturer	Canon
Sensor type	Area CMOS
Shutter type	rolling shutter
Sensor size (h x v)	29.2 x 20.19 mm
Optical diagonal	35.5 mm
Sensor format	APS-H
Pixel size (h x v)	2.2 x 2.2 μm

Camera

Exposure modes	MANUAL;AUTO
Trigger modes	INTERNAL;SOFTWARE;EXTERNAL
Exposure time (min)	40 μs
Exposure time (max)	1 sec (external ∞)
Pixel format / max	mono8, mono10 / 10 bit
Gain modes / max	manual, auto / 8 dB
S/N ratio	39.8 dB
Dynamic range	60.5 dB
Pixel clock	85 MHz
Internal memory	512 MB SDRAM, 160 MB Flash

Feature Set

Manual white balance	yes
Automatic white balance	yes
AOI	yes
LUT	yes
Offset	yes
Binning	yes
Shading correction	yes (external)
Defect pixel correction	yes


Housing

Lens mount	M58
Dimensions (w x h x d)	70 x 70 x 51 mm
Weight	380 g
Operating temperature	-10 to 55 °C
Ambient humidity	10 to 90 % (non-condensing)
Protection class	IP30

I/O-Interfaces

Input up to 24V	2 x
Input OPTO	1 x
Output open drain	4 x
I/O RS-232	1 x
Power supply	10 to 25 V (DC)
Power consumption	12 W (dep. on operating mode)

Dimensions [mm]

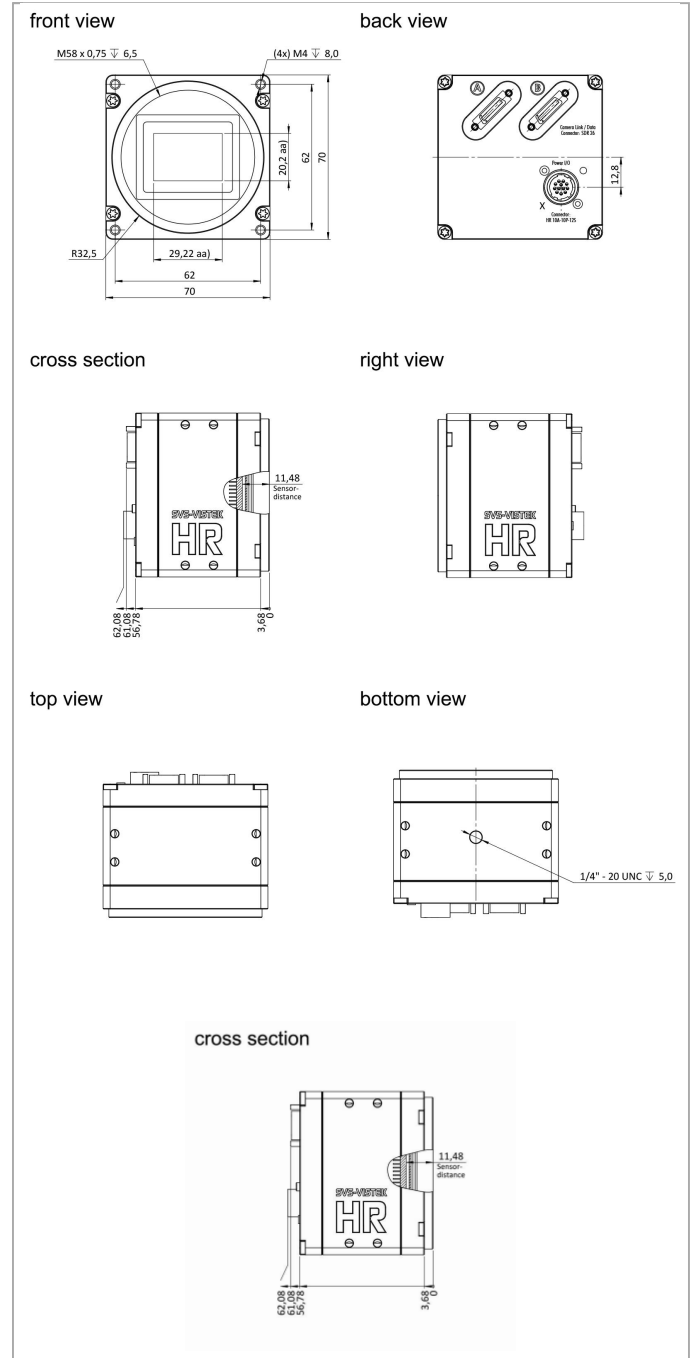

Pinout

