


Line Light Series

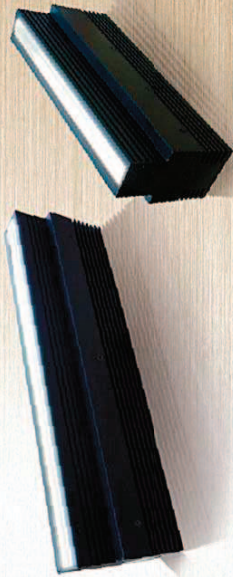

Features

1. Provide higher intensity and uniformity than conventional lights
2. Emitting surfaces length can be suitable for application form 100mm as a base increment to 1000mm.
3. Enable high resolution and high speed processing application.
4. Line lighting
5. Mounted on movable modules

Major applications

1. Coaxial lighting for highly reflective surfaces, such as wafers, metal surfaces, liquid-crystal and glass adjustment.

Model explanation



Available Models

Model	Color	Power Consumption	Weight (g)	Dimension
GL-LS2-100R	●	150mA/3.4W	650	1
GL-LS2-100W	○	350mA/11.7W		
GL-LS2-200R	●	150mA/6.7W	1113	2
GL-LS2-200W	○	350mA/23.4W		
GL-LS2-300R	●	150mA/11.7W	1649	3
GL-LS2-300W	○	350mA/35.1W		
GL-LS2-400R	●	150mA/13.4W		4
GL-LS2-400W	○	350mA/46.8W		

Dimmer For Line Light



GLC-RPI2-415
GLC-RPI2-435

Available Models

Power Model	Power Requirement	Output	Connector	Output Type	Dimension	Weight (g)
GLC-RPI2-215		150mA			5	1862
GLC-RPI2-415	AC100V~AC240V		HR30-7R-12P	Current Control	6	1984
GLC-RPI2-235		350mA			5	1862
GLC-RPI2-435		350mA			6	1984

Dimensional Diagrams(mm)

